



Crompton Greaves Consumer
Electricals Ltd.

TECHNICAL DATA SHEET

FORM No. DSG/FR/08

Doc Classification:
Restricted-4

Division:
Lighting

Department: Design
and Development

Document Number: TD 0906205


Revision:00

Date:06/10/2020

Page 1 of 4

Issue No. 1

Issue Date:02-05-2018

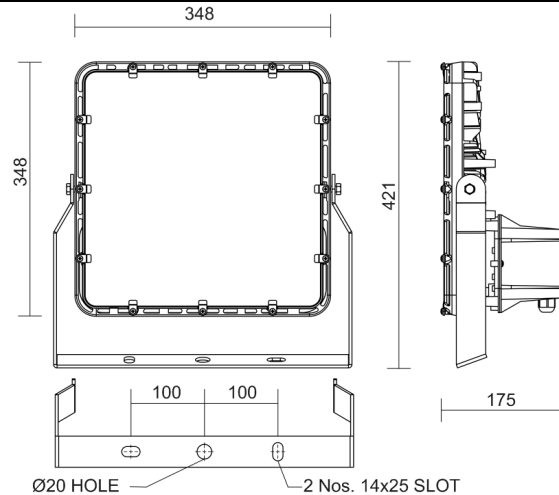

DIMENSIONS SHOWN ARE FOR INSTALLATION REFERENCES ONLY AND WILL HAVE TOLERANCE $\pm 3\text{mm}$ UNLESS OTHERWISE SPECIFIED

GENERAL:

Elegantly designed highly efficient PDC aluminium housing in powder coated finish. Heat resistant toughened glass, Fins are provided on housing for better heat dissipation. This luminaire is recommended for illuminating Area lighting, Facade lighting,

PRODUCT DESCRIPTION	**NOMINAL WATTAGE (W)	CCT (K)	CRI	VOLTAGE (V)	**MAINS CURRENT (A)	*APPROX WT (KG)
CFS-506-250-57-60D-SL-GL-NSG	250	5700	70	240	1.10	8.10
Efficacy - 110 LPW						

*ONLY FOR STRUCTURAL/MOUNTING DESIGN CONSIDERATION

**RATED SYSTEM WATTAGE AND CURRENT WILL HAVE TOLERANCE AS PER IS 16104: 2012

Title: 250W LED Floodlight	Type:	Customer Reference:
Product Description: CFS-506-250-57-60D-SL-GL-NSG		
PREPARED BY ganesh.dhuri	CHECKED BY -	APPROVED BY -

Note: 1 AS EFFORTS ARE ON CONSTANTLY TO IMPROVE THE DESIGN AND METHODS OF MANUFACTURE OF THE PRODUCT, THE PRODUCT SUPPLIED MAY DIFFER IN DETAIL FROM THE DATA GIVEN HERE IN

2. THIS DRAWING & DESIGN IS THE PROPERTY OF CROMPTON GREAVES CONSUMER ELECTRICALS LTD. AND MUST NOT BE COPIED OR LENT WITHOUT THEIR PERMISSION IN WRITING

3. THE "APPROVED" INDICATED THAT IT IS A CONTROL COPY

4. DIMENSION SHOWN ARE FOR INSTALLATION REFERENCE ONLY AND IN MM WITH TOLERANCE OF $\pm 3\text{mm}$ UNLESS OTHERWISE SPECIFIED



Crompton Greaves Consumer
Electricals Ltd.

TECHNICAL DATA SHEET

FORM No. DSG/FR/08

Doc Classification:
Restricted-4

Division:
Lighting

Department: Design
and Development

Document Number: TD 0906205

Revision:00

Date:06/10/2020

Page 2 of 4

Issue No. 1

Issue Date:02-05-2018

MATERIAL SPECIFICATIONS:

Housing	Die cast Aluminium powder coated in Grey RAL-7032
Driver Housing	Die cast Aluminium powder coated in Grey RAL-7032
Internal Wiring	PVC coated multistrand wire
Mains Terminal	1 no 3 way 10 amps suitable for terminating max. 2.5 sq mm incoming cable.
Earthing	Suitable for 14 SWG earthing wire.
Surge Arrestor	1 No. 10 KV, 440V

ELECTRICAL PARAMETERS:

Rated Voltage (V)	240V
Frequency (Hz)	50 Hz ± 3
Operating Voltage Range (V)	120 - 270 ~
Current (A) @ 240V	1.10
Wattage (W) @240V	250
P.F.	> 0.95
I THD	< 10%
Lumen	-

PREPARED BY
ganesh.dhuri

CHECKED BY
-

APPROVED BY
-

Note: 1 AS EFFORTS ARE ON CONSTANTLY TO IMPROVE THE DESIGN AND METHODS OF MANUFACTURE OF THE PRODUCT, THE PRODUCT SUPPLIED MAY DIFFER IN DETAIL FROM THE DATA GIVEN HERE IN
2. THIS DRAWING & DESIGN IS THE PROPERTY OF CROMPTON GREAVES CONSUMER ELECTRICALS LTD. AND MUST NOT BE COPIED OR LENT WITHOUT THEIR PERMISSION IN WRITING
3. THE "APPROVED" INDICATED THAT IT IS A CONTROL COPY
4. DIMENSION SHOWN ARE FOR INSTALLATION REFERENCE ONLY AND IN MM WITH TOLERANCE OF +/-3mm UNLESS OTHERWISE SPECIFIED



Crompton Greaves Consumer
Electricals Ltd.

TECHNICAL DATA SHEET

FORM No. DSG/FR/08

Doc Classification:
Restricted-4

Division:
Lighting

Department: Design
and Development

Document Number: TD 0906205

Revision:00

Date:06/10/2020

Page 3 of 4

Issue No. 1

Issue Date:02-05-2018

INSTALLATION:

Cable Entry	Through Cable Gland
Mounting System	Cradle having 2Nos. 14x25mm slot & 1No. Ø20mm hole provided for mounting.
Maintenance	Control Gear Cover can be removed for accessories maintenance.
Protection	IP66

PRODUCT ORDERING CODE:

Product Description	Ordering Code
CFS-506-250-57-60D-SL-GL-NSG	CLF500700-A2

PREPARED BY
ganesh.dhuri

CHECKED BY
-

APPROVED BY
-

Note: 1 AS EFFORTS ARE ON CONSTANTLY TO IMPROVE THE DESIGN AND METHODS OF MANUFACTURE OF THE PRODUCT, THE PRODUCT SUPPLIED MAY DIFFER IN DETAIL FROM THE DATA GIVEN HERE IN
2. THIS DRAWING & DESIGN IS THE PROPERTY OF CROMPTON GREAVES CONSUMER ELECTRICALS LTD. AND MUST NOT BE COPIED OR LENT WITHOUT THEIR PERMISSION IN WRITING
3.THE "APPROVED" INDICATED THAT IT IS A CONTROL COPY
4. DIMENSION SHOWN ARE FOR INSTALLATION REFERENCE ONLY AND IN MM WITH TOLERANCE OF +/-3mm UNLESS OTHERWISE SPECIFIED



Crompton Greaves Consumer
Electricals Ltd.

TECHNICAL DATA SHEET

FORM No. DSG/FR/08

Doc Classification:
Restricted-4

Division:
Lighting

Department: Design
and Development

Document Number: TD 0906205

Revision:00

Date:06/10/2020

Page 4 of 4

Issue No. 1

Issue Date:02-05-2018

SPARES ORDERING REFERENCE:

Product Description	Driver	Surge Arrestor	Glass	
CFS-506-250-57-60D-SL-GL-NSG	Xitanium 150W 0.7A 240V I X150C070V210FNI1BO + Xitanium 100W 0.7A 240V Y X100C070V143FNY1BO	SRPSQ-10KV-5KA- 440V	S0906066	

PREPARED BY
ganesh.dhuri

CHECKED BY
-

APPROVED BY
-

Note: 1 AS EFFORTS ARE ON CONSTANTLY TO IMPROVE THE DESIGN AND METHODS OF MANUFACTURE OF THE PRODUCT, THE PRODUCT SUPPLIED MAY DIFFER IN DETAIL FROM THE DATA GIVEN HERE IN
2. THIS DRAWING & DESIGN IS THE PROPERTY OF CROMPTON GREAVES CONSUMER ELECTRICALS LTD. AND MUST NOT BE COPIED OR LENT WITHOUT THEIR PERMISSION IN WRITING
3.THE "APPROVED" INDICATED THAT IT IS A CONTROL COPY
4. DIMENSION SHOWN ARE FOR INSTALLATION REFERENCE ONLY AND IN MM WITH TOLERANCE OF +/-3mm UNLESS OTHERWISE SPECIFIED