


VistaGlow

Urban Style Bulkhead

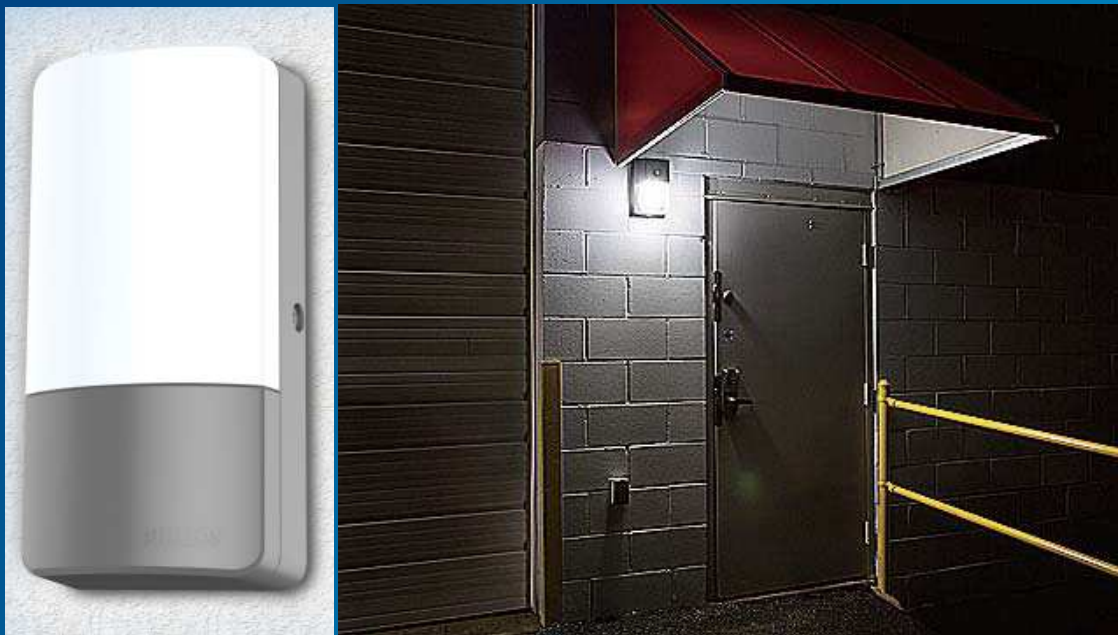

innovation  you

PHILIPS

Product Features

Use with peace of mind

- Suitable for Surface mounting
- 700 Lumen @ 6.5 W
- IP 65 , IK 08
- Efficacy : 105 lm/W
- CRI > 80
- Point to point replacement for Conventional Bulkhead
- PF > 0.9

Long-lasting performance

- Designed for energy savings of up to 55% compared to conventional lighting
- L70B50 25k hours*
*(*Designed to sustain 70% of initial lumen output (L70) at 25,000 hours of lifetime)*

High-quality materials and design

- Pressure Die Cast aluminium housing enhances life of housing
- Polycarbonate Diffuser makes it impact resistant

Wide selection

- Choice of color temperature –
- Cool white (6500K), Neutral white (4000K)



Product Specifications

Parameter	WT 120C -700 Lumen
Lumen output	700 Lm
System wattage	6.5 W
Efficacy	105
CCT	4000K / 6500K
CRI	>80
Mounting	Wall/Surface
Housing	Pressure Die Cast Aluminum
IP Rating	IP 65
Life	L70B50 25,000 hrs.
Operating temperature	Upto 45 deg C
IK rating	08
PF	> 0.9
THD	< 20 %
Input voltage range	140V - 270V AC
SDCM	< 5
Diffuser	PC
Dimensions	190x95x55 mm
Serviceability	Class C – Non Replaceable Driver
Surge protection	2.5 kV

Product Applications

- Building Periphery
- Pathways
- Corridors



Ordering Details

12 NC	Product Description	Qty. per Box
9195 158 12243	WT140W LED7S CW PSU S1 PC	20 Nos.
9195 158 12244	WT140W LED7S NW PSU S1 PC	20 Nos.

How to read the Cat ref

WT140W LED7S-CW PSU S1 PC

